

Fig. 1

2/14

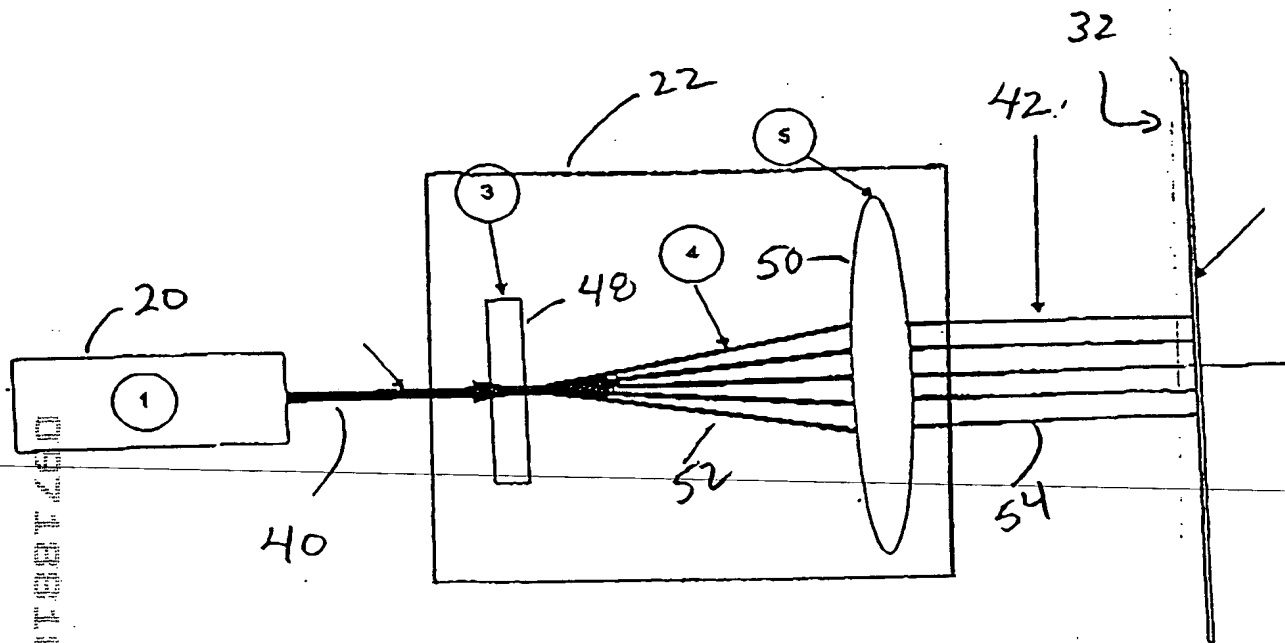


Fig. 2

3/14

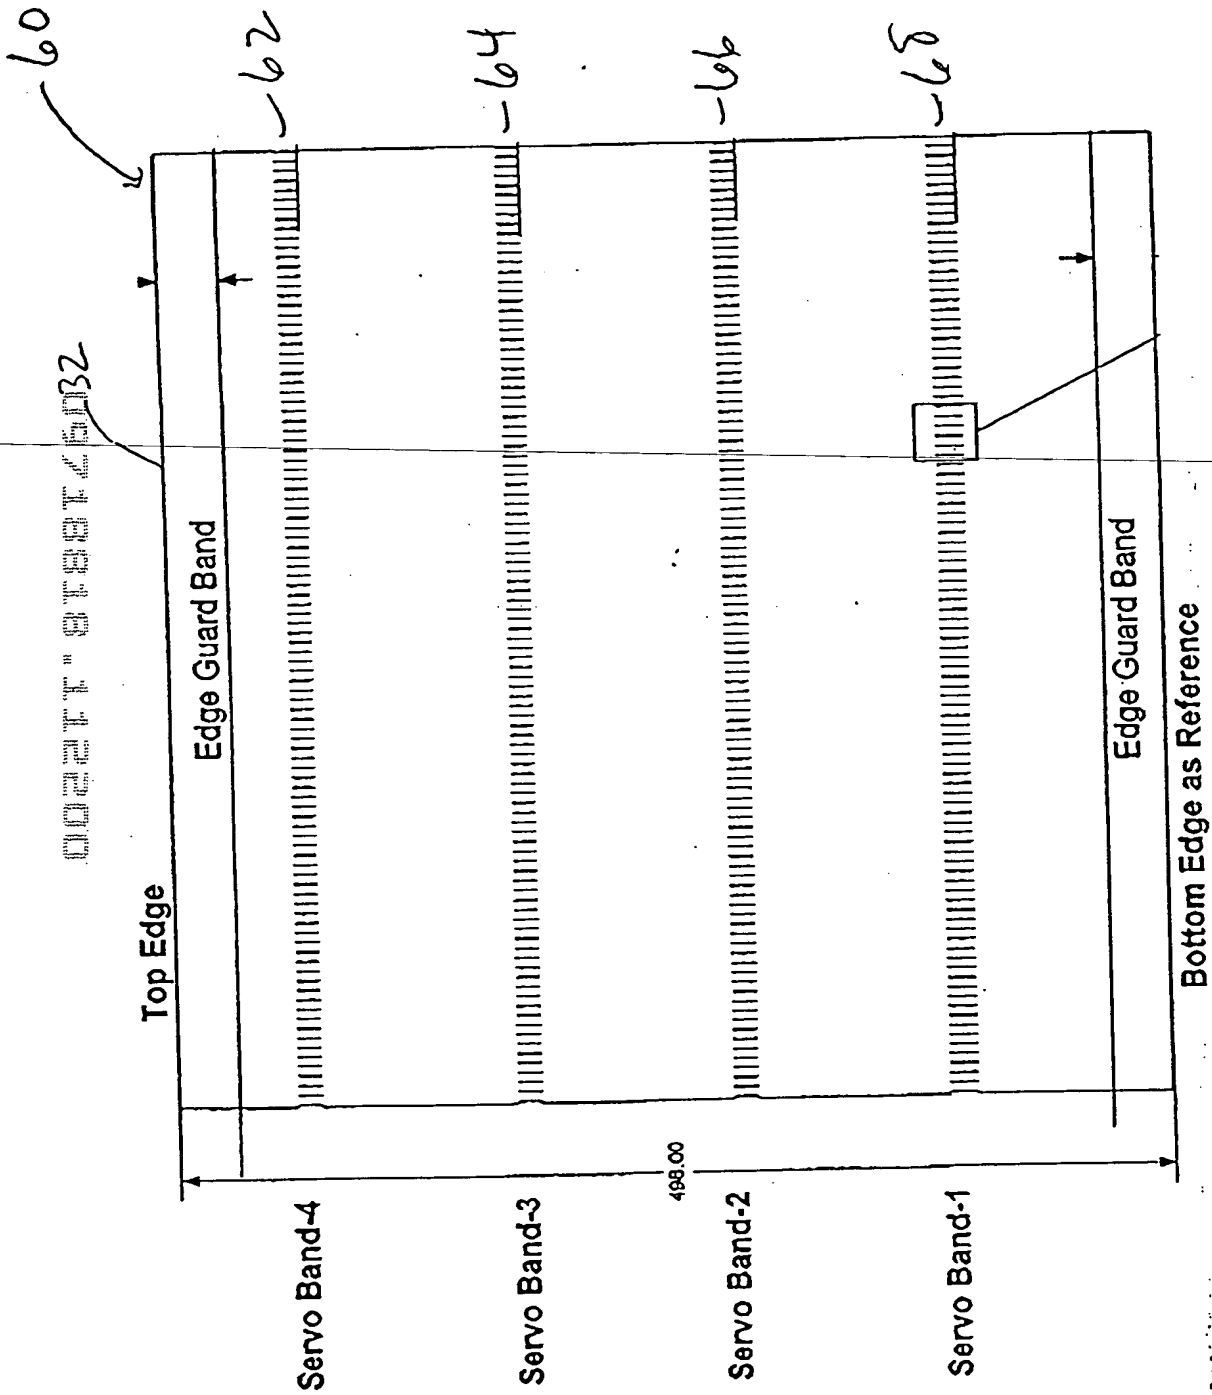


Fig 3


FIG. 4 SERVO WINDING WITHIN A BAND(13.5/12/

24)

Unit: micrometer

Rev.3

Hong Chen, AP&T,
SSPG, Quantum Corp.
3/2/99

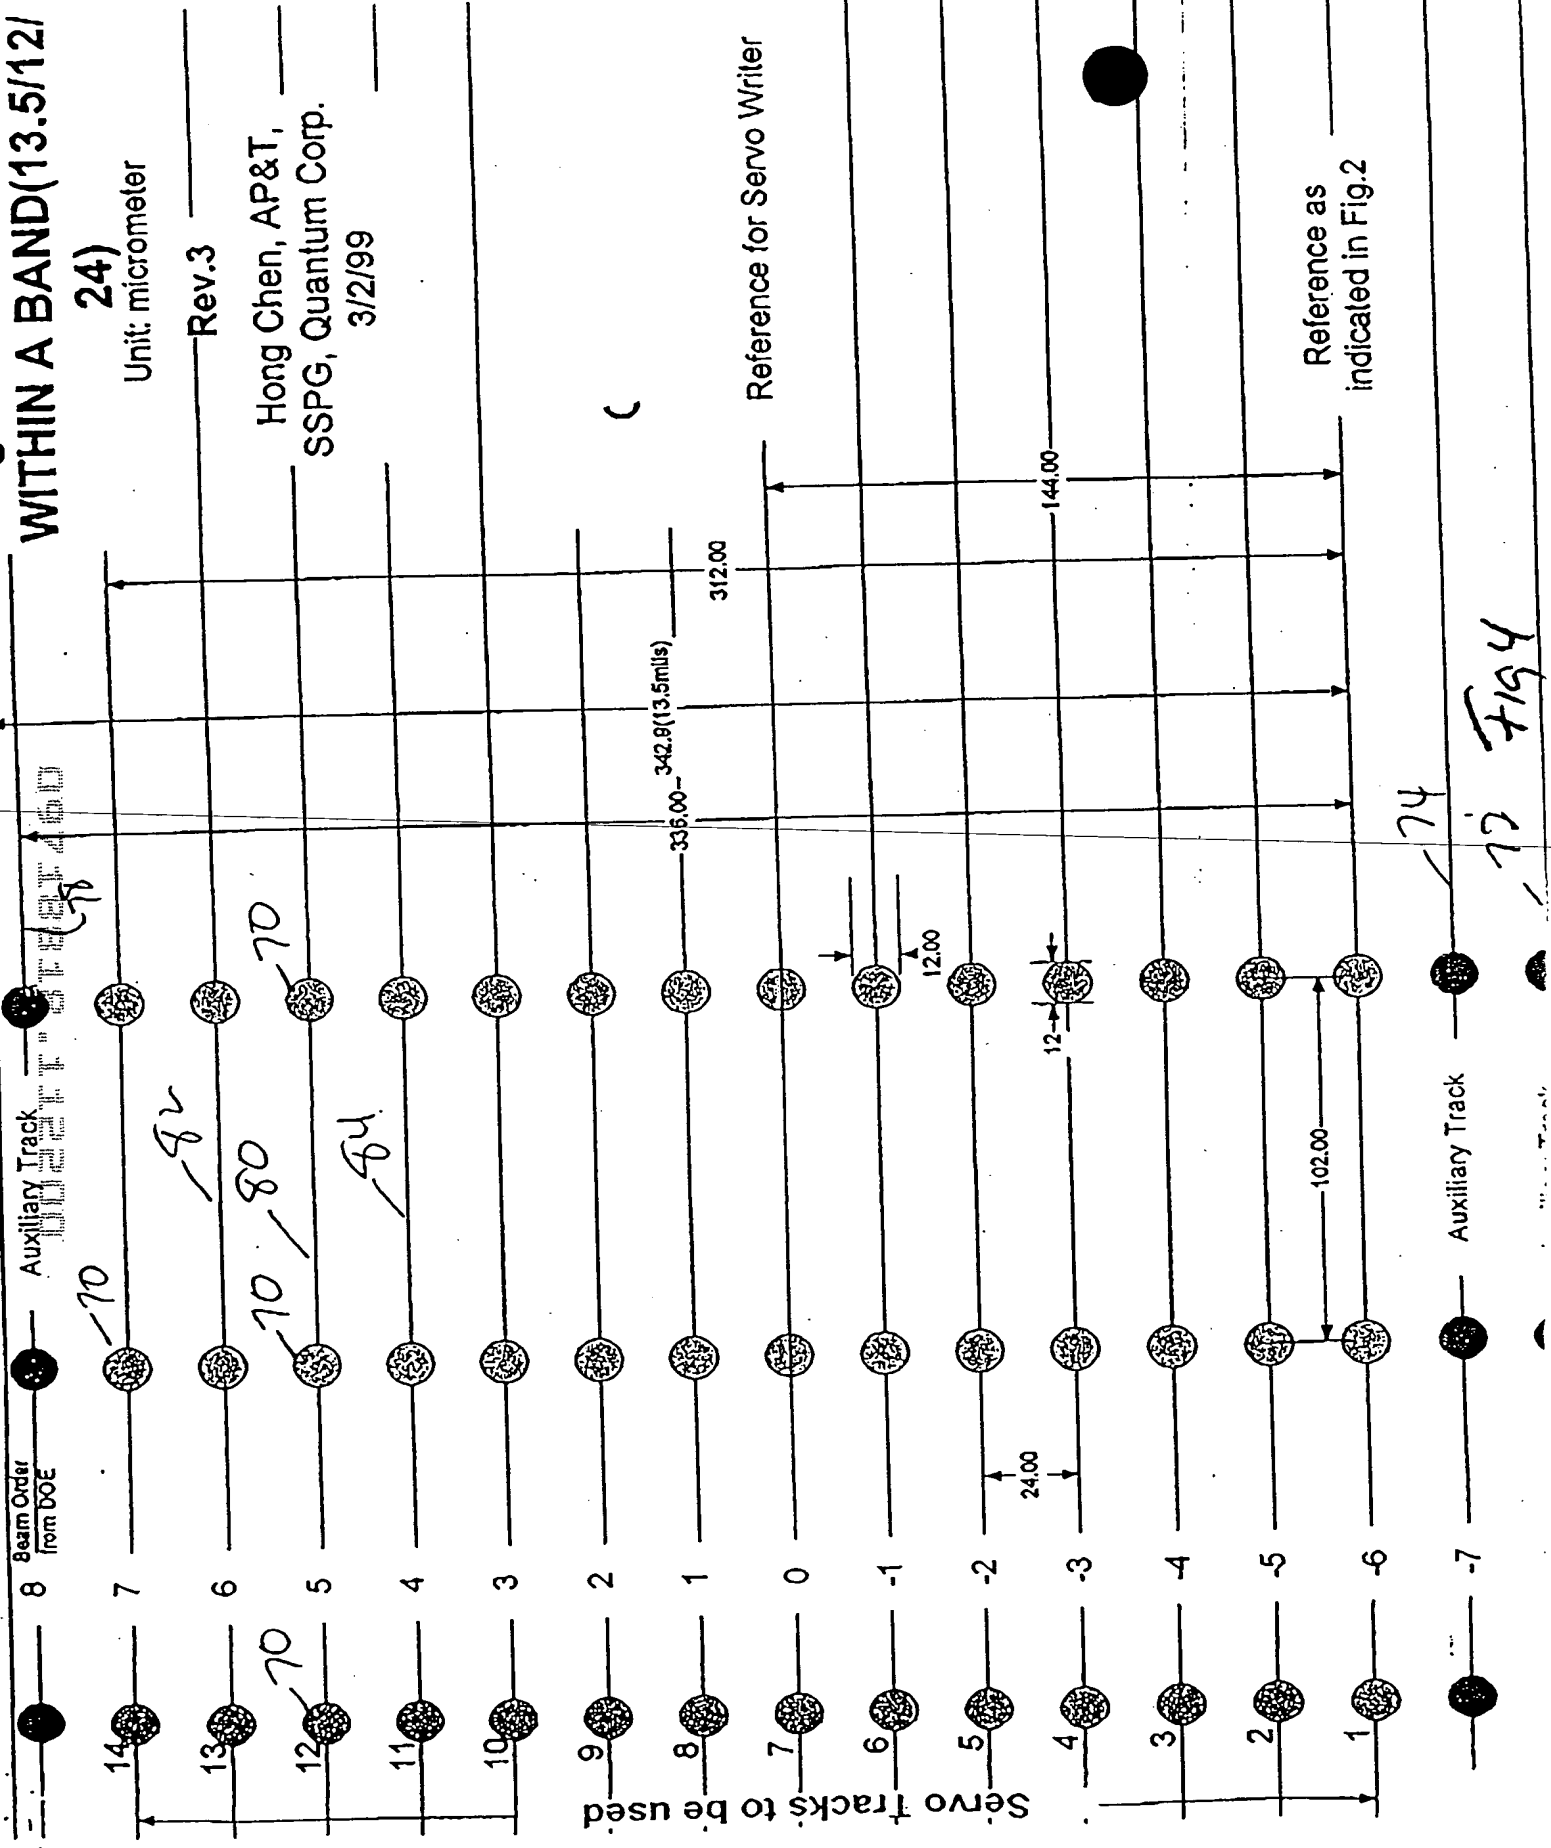

74
72 Fig 4

5/14

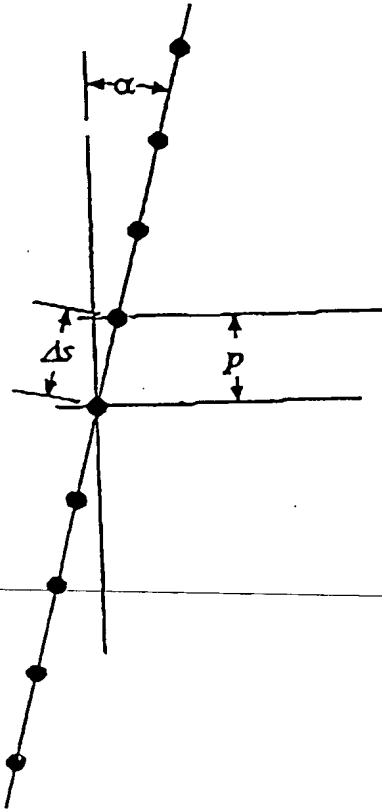


Fig 5

09718818 112200

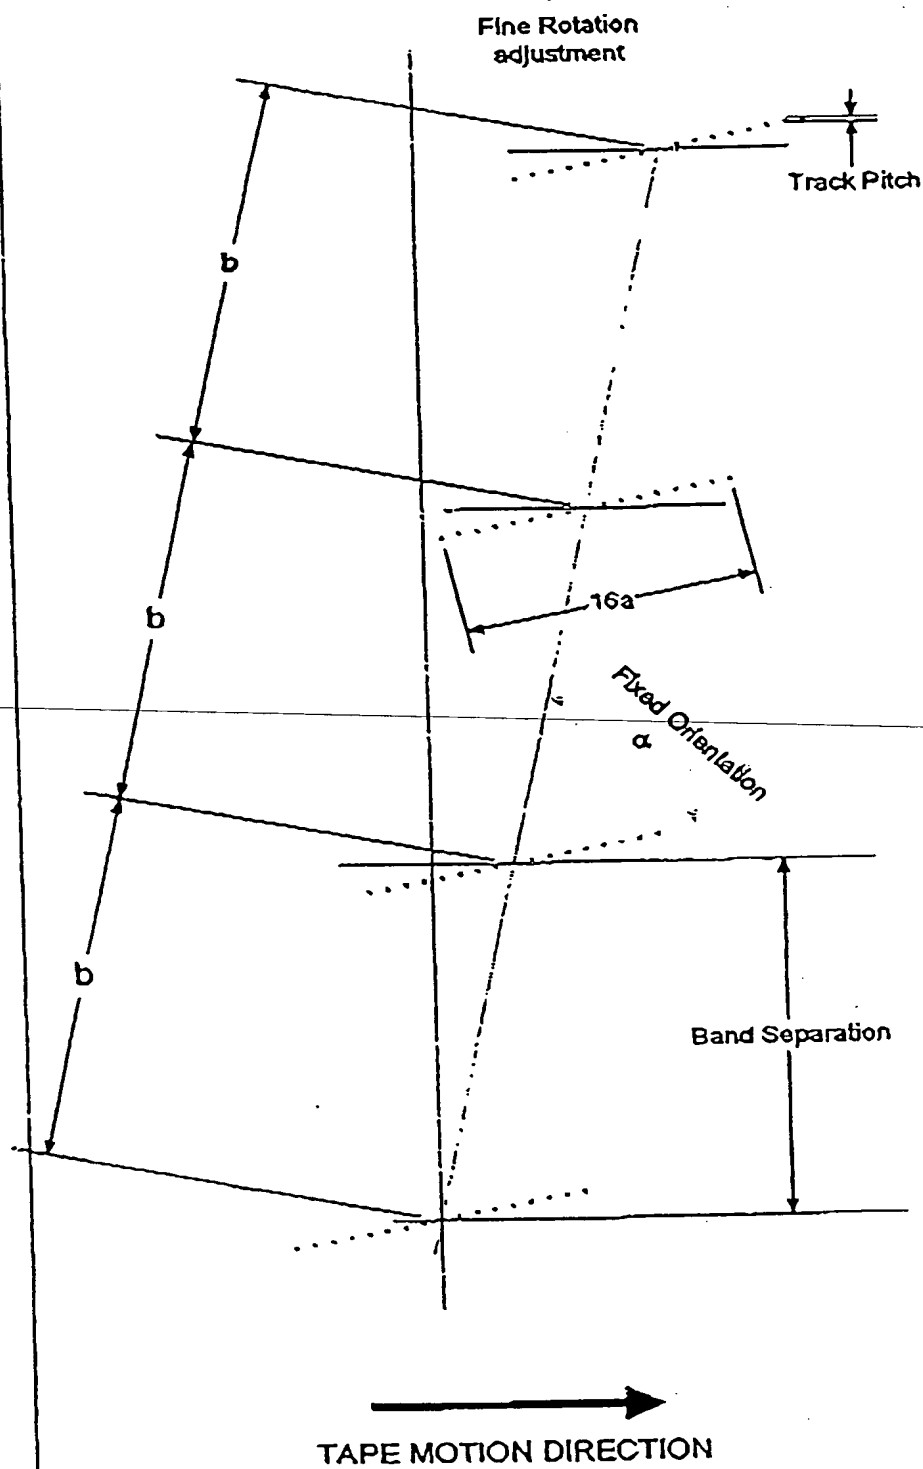
[illegible]

Fig 6

7/14

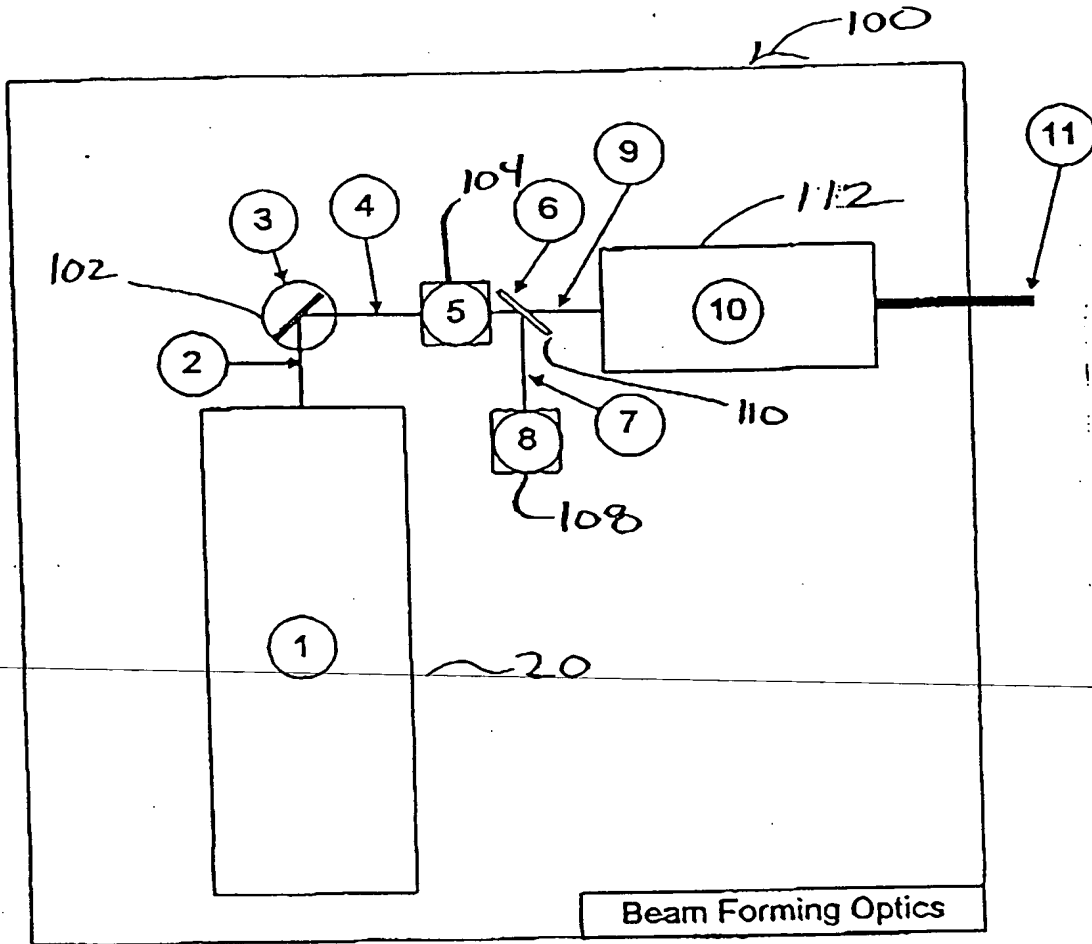


Fig. 7

09418818-11200

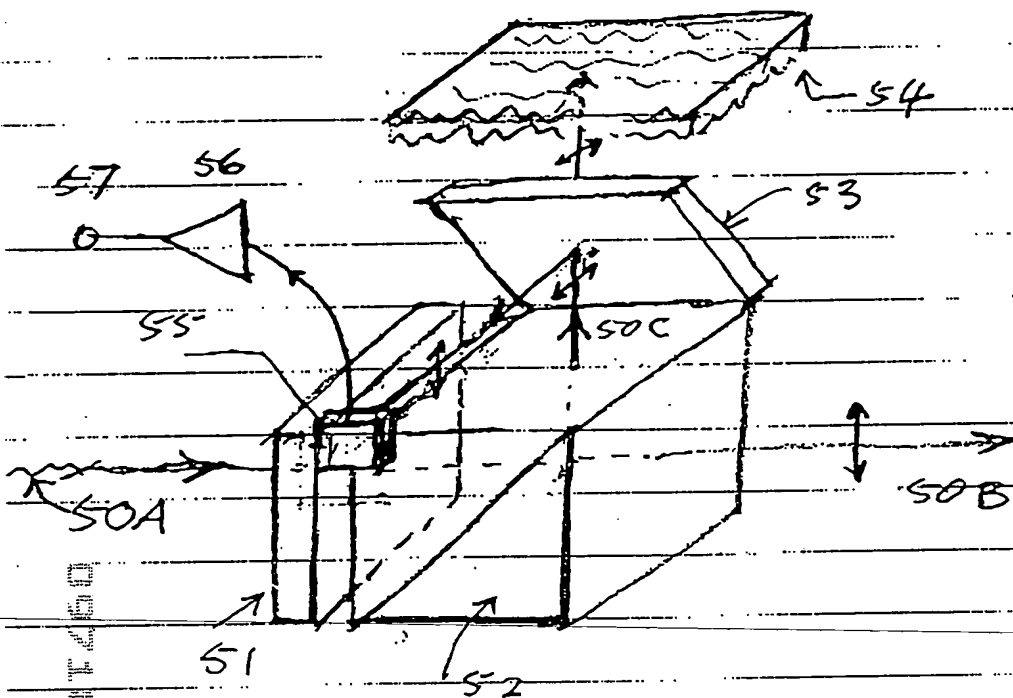


Fig. 8 Combined Attenuator and Power Monitor

BOOK REVIEW




Fig 9

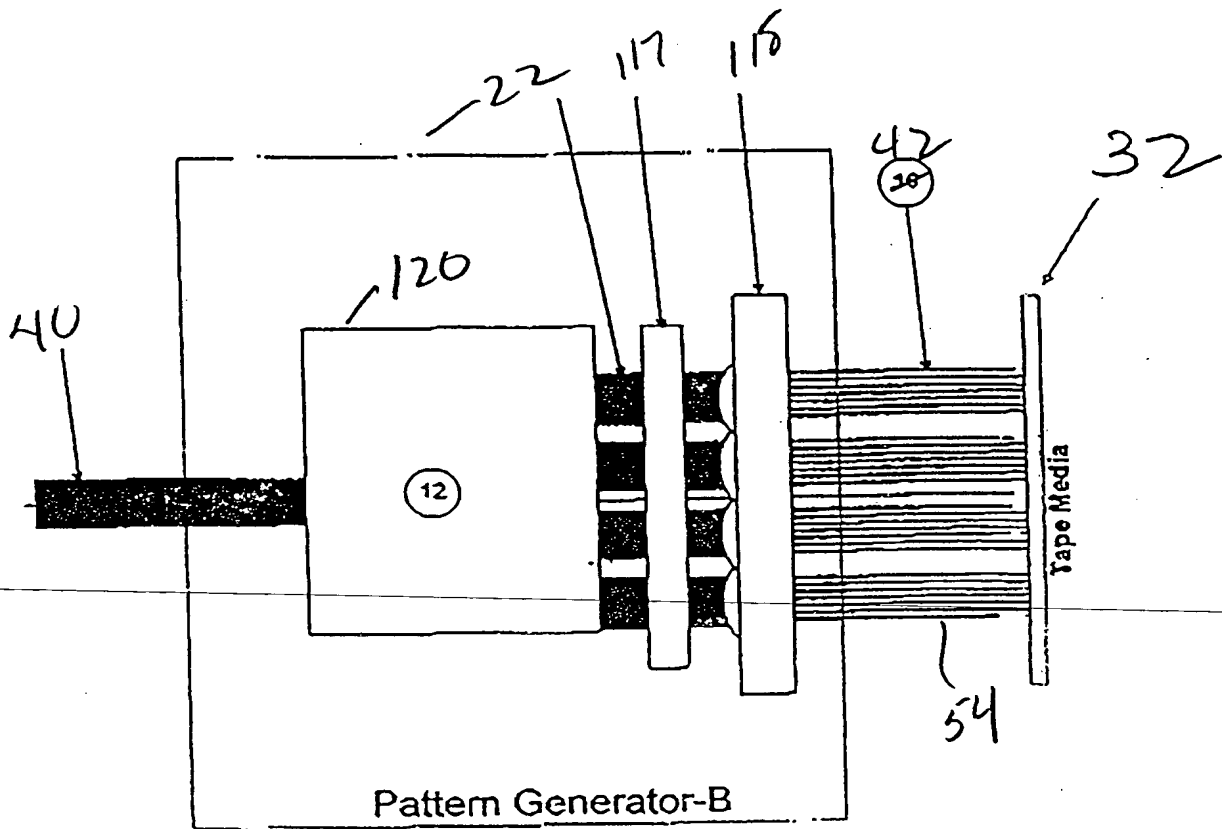


Fig. 10

11/14


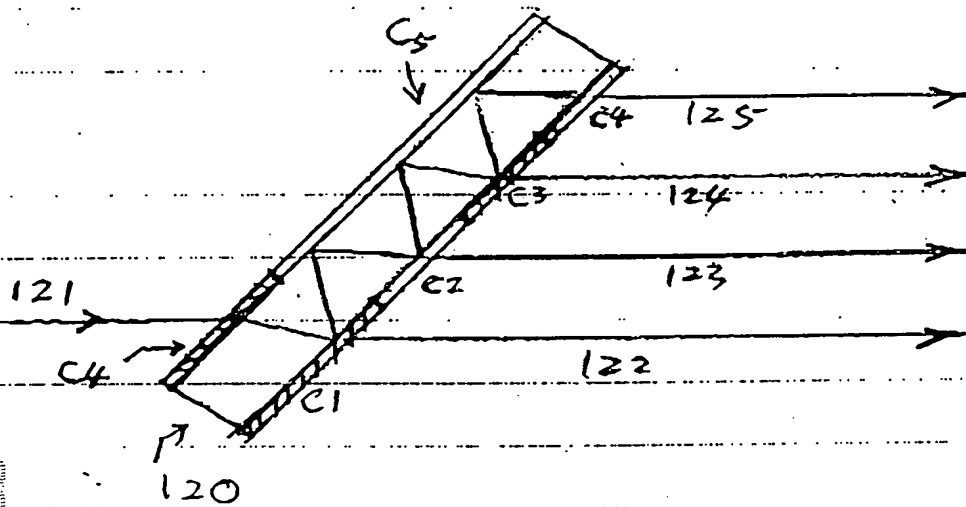


Fig. 11 Use of a segmented mirror to create 4 beams of equal intensity

12/14

Fig. 12

Side View

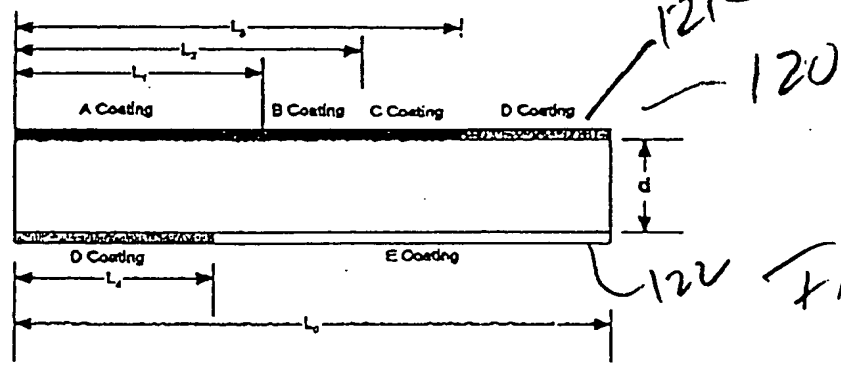

Top View

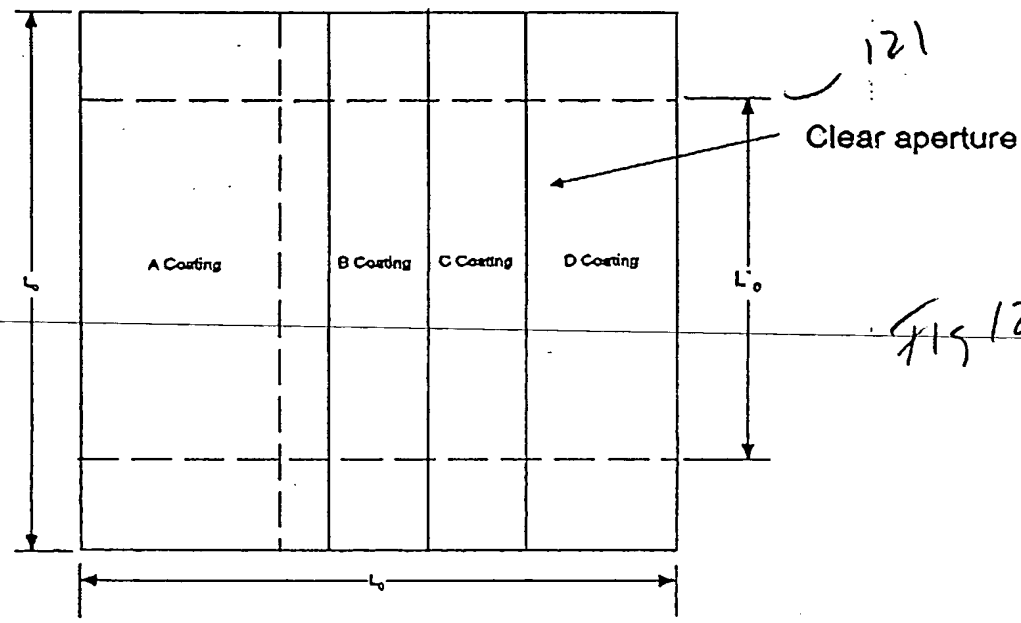


Fig 12B

: 532nm

00718213-1123000

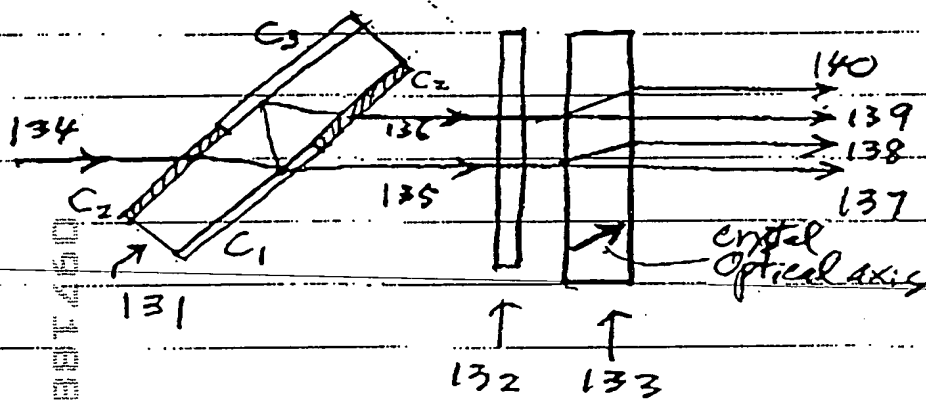


Fig. 13 Generation of multiple parallel beams by the combined use of a segmented mirror and a birefringent crystal plate



145